

BSOZAA30L

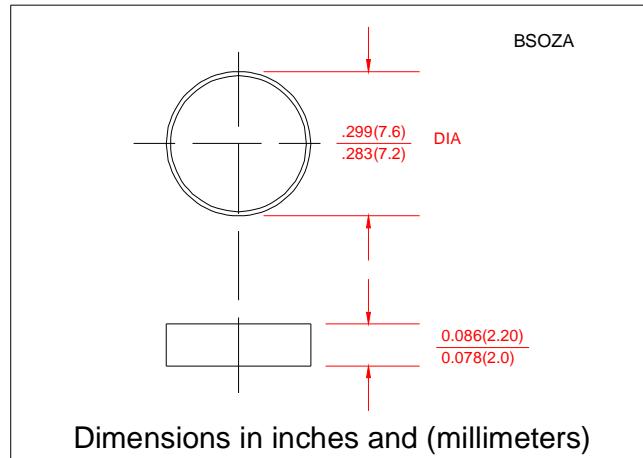
AVALANCHE VOLTAGE **20 to 24 Volts**
CURRENT **30 Amperes**

Technical Specification:
Features:

- High power capability
- Economical
- Avalanche Voltage: 20V to 24V

MECHANICAL DATA

- Copper slug
- Polarity: colour dots denotes cathode end
- Technology vacuum soldered
- Mounting position: Any
- Weight: 0.0219 ounce, 0.62 Grams


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

Electrical Characteristics @ 25°C	SYMBOLS	MIN	NOMINAL	MAX	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}		17		
Working Peak Reverse Voltage	V_{RRM}		17		Volts
DC Blocking Voltage	V_{DC}		17		
Average Rectified Forward Current ($T_c=125^\circ C$)	I_o		30		Amps
Repetitive Peak Reverse Surge Current $T_c=10\text{msec Dury Cycle}<1\%$	I_{RSM}		30		Amps
Breakdown Voltage ($V_{br} @ i_r=100\text{mA}, T_c=25^\circ C$) $i_r=90\text{Amps}, T_c=150^\circ C, P_W=80\text{usec}$	V_{br1} V_{br2}	20	22	24 32	Volts Volts
Forward Voltage Drop @ $I_f=100\text{Amps}<300\text{usec}$	V_F		1.0	1.1	Volts
Peak Forward Surge Current	I_{FSM}		400		Amps
Reverse Leakage ($V_R=17\text{Vdc}$) $T_A=25^\circ C$	I_R		1.0	2.0	uAmps
Operating and Storage Junction Temperature Range	T_J, T_{STG}		-65 to +175		°C

Notes: 1. Enough heatsink must be considered in application.

